


PORTABLE TOUCH-TYPE HIGH INTENSITY LED UV LAMP

HIGH QUALITY RELIABLE MODULE DESIGN FOR NDT APPLICATION
MEET ASME CODE REQUIREMENT
CE QUALIFIED APPROVED



NOVA 4S-BL

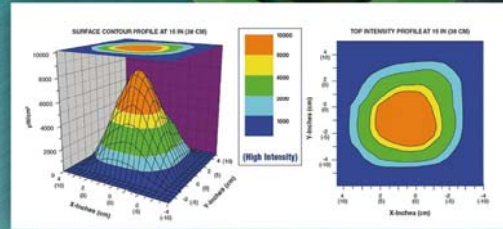

NOVA 4S AC



NOVA 4S AIO



4S-POWER SUPPLY

SPECIFICATION	NOVA 4S-BL	NOVA 4S AC	NOVA 4S AIO	4S-POWER SUPPLY
UV LED CHIP	NICHIA WITH LENS	NICHIA WITH LENS	NICHIA WITH LENS	—
NO. OF UV LED CHIP	4	4	4	—
UV WAVE LENGTH	365 nm	365 nm	365 nm	—
UV INTENSITY (DISTANCE 18")	6850uw/cm ²	6850w/cm ²	6850uw/cm ²	—
WHITE LIGHT	LESS 2 ft/cd	LESS 2 ft/cd	LESS 2 ft/cd	—
AVERAGE LED LIFE	30000 HOURS	30000 HOURS	30000 HOURS	—
MERCURY	FREE	FREE	FREE	—
WARM UP	INSTANT ON/OFF	INSTANT ON/OFF	INSTANT ON/OFF	—
DUTY CYCLE	100%	100%	100%	—
UV BEAM DIA.	112mm	112mm	112mm	—
QUARTZ GLASS	STANDARD	STANDARD	STANDARD	—
UV GLASS	OPTIONAL	OPTIONAL	OPTIONAL	—
POWER SUPPLY	AC/DC	AC	AC/DC	—
BATTERY(LI-ION)	16V	—	16V	16V
BATTERY USE HOURS	≤8hr	—	≤8hr	≤8hr
BATTERY CHARGE TIME ≥	3.5hr	—	3.5hr	3.5hr
OUTSIDE DIMENSION (WITH HANDLE)	140x130x230	140x130x230	200x130x150	135x130x150
TOTAL WEIGHT	1.24Kg	640g	1.41Kg	1.1kg
PROTECT CARRY CASE	OPTIOANL	OPTIOANL	OPTIOANL	OPTIOANL



KEIYU NDT SUPPLY CO.

1F., No.409, Sec. 6, Zhongxiao E. Rd., Nangang Dist., Taipei City 115, Taiwan (R.O.C.)
TEL: 02-26534530 FAX: 02-26547597
E-Mail : sale@keiyu-ndt.com.tw

Web site: www.keiyu-ndt.com.tw

Skype:keiyu-ndt