

# PORTABLE HIGH INTENSITY LED UV LAMP


HIGH QUALITY RELIABLE MODULE DESIGN FOR NDT APPLICATION  
MEET ASME CODE REQUIREMENT  
CE QUALIFIED APPROVED



SN4A



SN4ADC-TH

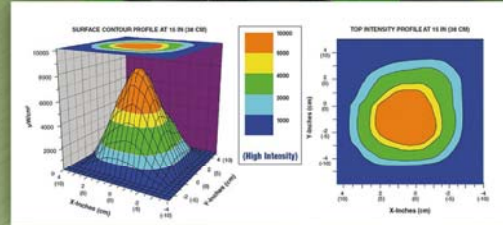

SN4ADC-H



UNIVERSAL SN4ADC



UNIVERSAL NOVA4S



SUPER NOVA 5S

SPECIFICATION	SN4A	SN4ADC-TH	SN4ADC-H	UNIVERSAL SN4ADC	UNIVERSAL NOVA4S	SUPER NOVA 5S
UV LED CHIP	NICHIA WITH LENS	NICHIA WITH LENS	NICHIA WITH LENS	NICHIA WITH LENS	NICHIA WITH LENS	NICHIA WITH LENS
NO. OF UV LED CHIP	4	4	4	4	4	4
UV WAVE LENGTH	365 nm	365 nm	365 nm	365 nm	365 nm	365 nm
UV INTENSITY (18")	9910 uw/cm <sup>2</sup>	9910 uw/cm <sup>2</sup>	10120uw/cm <sup>2</sup>	9910 uw/cm <sup>2</sup>	9910 uw/cm <sup>2</sup>	10120uw/cm <sup>2</sup>
WHITE LIGHT	LESS 2 ft/cd	LESS 2 ft/cd	LESS 2 ft/cd	LESS 2 ft/cd	LESS 2 ft/cd	LESS 2 ft/cd
AVERAGE LED LIFE	30000 HOURS	30000 HOURS	30000 HOURS	30000 HOURS	30000 HOURS	30000 HOURS
MERCURY	FREE	FREE	FREE	FREE	FREE	FREE
WARM UP	INSTANT ON/OFF	INSTANT ON/OFF	INSTANT ON/OFF	INSTANT ON/OFF	INSTANT ON/OFF	INSTANT ON/OFF
FAN COOL	○	○	○	○	○	—
DUTY CYCLE	100%	100%	100%	100%	100%	100%
BEAM DIA.	112mm	112mm	112mm	112mm	112mm	93 x93 mm
QUARTZ GLASS	○	○	○	○	○	○
UV GLASS	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL
POWER SUPPLY	AC	AC/DC	DC	AC/DC	AC	DC
BATTERY	—	16V	16V	16V	—	16V
BATTERY USE HOURS	—	≤6hr	≤8hr	≤6hr	—	>10hr
BATTERY CHARGE TIME ≥	—	3.5hr	2.5hr	3.5hr	—	4hr
OUTSIDE DIMENSION ( WITH HANDLE)	200x130x210	200x130x150	135x130x150	200x130x210 BATTERY :170x105x145.	200x130x210	263x180x135 Rod 580mm
TOTAL WEIGHT	1.1kg	1.54kg	1.2kg	2.43kg	1.1kg	2.8kg
PROTECT CARRY CASE	OPTIOANL	OPTIOANL	OPTIOANL	OPTIOANL	OPTIOANL	OPTIOANL



## KEIYU NDT SUPPLY CO.

1F., No.409, Sec. 6, Zhongxiao E. Rd., Nangang Dist., Taipei City 115, Taiwan (R.O.C.).  
TEL: 02-26534530 FAX: 02-26547597  
E-Mail : sale@keiyu-ndt.com.tw

Web site: [www.keiyu-ndt.com.tw](http://www.keiyu-ndt.com.tw)

Skype:keiyu-ndt